


EnvelopedData

: rutoken::pkicore::cms

: pki-core-cpp.h

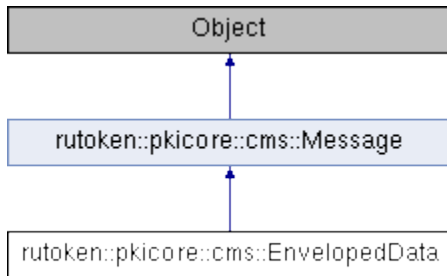

class [DecryptParams](#) CMS

EnvelopedData (EnvelopedData &&v)	
EnvelopedData & operator= (EnvelopedData &&v)	
Message decrypt (const DecryptParams &decryptParams)	
std::vector< uint8_t > toBer () const	BER

, [rutoken::pkicore::cms::Message](#)

Message (Message &&v)	
Message & operator= (Message &&v)	
ContentType::Type contentType () const	

static EnvelopedData cast (Object &&v)	
template<typename T> static EnvelopedData parse (T begin, T end)	BER
template<typename T> static EnvelopedData parse (const T &container)	BER

, [rutoken::pkicore::cms::Message](#)

static [Message](#) cast (Object &&v)