


# Pkcs11UserCert

```
, . . .
: rutoken::pki-core
: pki-core-cpp.h
```

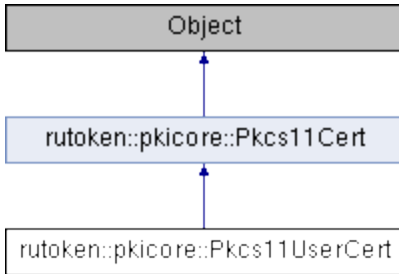

Pkcs11UserCert (Pkcs11UserCert &&v)	
Pkcs11UserCert &operator= (Pkcs11UserCert &&v)	
Pkcs11PrivateKey getCorrespondingPrivateKey ()	,

## , rutoken::pkicore::Pkcs11Cert

Pkcs11Cert (Pkcs11Cert &&v)	
Pkcs11Cert &operator= (Pkcs11Cert &&v)	
X500Dn getSubject () const	Subject .
bool isTrusted () const	.
std::string toPem () const	PEM

```
static Pkcs11UserCert cast (Object &&v)
```

## , rutoken::pkicore::Pkcs11Cert

```
static Pkcs11Cert cast (Object &&v)
```

```
Pkcs11PrivateKey getCorrespondingPrivateKey ()
```

```
, . . .
```

```
X500Dn getSubject () const
```

---

<code>bool isTrusted</code>	<code>() const</code>
-----------------------------	-----------------------

---

<code>std::string toPem</code>	<code>() const</code>
--------------------------------	-----------------------

PEM.