


# SignedData

: rutoken::pki-core::cms

: pki-core-cpp.h

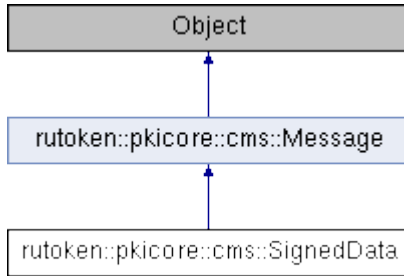

SignedData (SignedData &&v)	
SignedData & operator= (SignedData &&v)	
VerifyResult::Type verify (const VerifyParams &verifyParams)	
std::vector< uint8_t > toBer () const	BER

, **rutoken::pkicore::cms::Message**

Message (Message &&v)	
Message & operator= (Message &&v)	
ContentType::Type contentType () const	

static SignedData cast (Object &&v)	
template<typename T> static SignedData parse (T begin, T end)	BER
template<typename T> static SignedData parse (const T &container)	BER

, **rutoken::pkicore::cms::Message**

static Message cast (Object &&v)